

XE-W/OR SERIES

ELECTRIC SELF-PROPELLED SCISSOR LIFT



Standard Features

- Foldable platform
- Diagnosis system
- 4 wheel drive
- Tilt alarm system
- Fault diagnosis system
- Explosion-proof of the tube
- Automatic brake system
- 406*152 non-marking solid rubber tires
- Hour meter
- Proportional control
- Lifting hoists
- Manual emergency lower system
- Safety brackets
- Main power switch
- Automatic leveling hydraulic outriggers
- Maintenance free battery

Options Features


- Air line to the platform
- Platform work light
- Special hydraulic oil
- Top limit protection auto-stop device
- Power socket to the platform
- Overload sensor

XE-W/OR SERIES

The XE80W/OR is converted to a hilly ground design. When the lift can automatically level and lift on the uneven ground of 10 degrees front and rear and 45 degrees left and right. The large carrying capacity can carry 550KG. The platform can be extended to 3.3 meters and the working height can be up to 8 meters. The XE80W/OR has a powerful gradeability, and it can be easily controlled on 35% of the slope. At the same time, XE80W/OR continues the XE80W's intelligent control system, and the on-board diagnostic system allows customers to control the status of the equipment at any time.

型号	XE80W/OR
Working height max(m) H1	8
Platform height max(m) H2	6
Platform height mini(m)(1)	1.02
Outreach(m) (2)	1
Lifting capacity(kg)	550
Lifting capacity(kg)(Extended platform)	120
Platform size(m) (3x4x5)	2.3 x 1.15 x 1.1
The length of platform extended(m)(6)	3.3
Skirting board height(m)(7)	0.17
Stowed length and width(m)(8*9)	2.55*1.2
Stowed height(m)(10)	2.25
Stowed height(m)(11)	1.65
Wheelbase(m)(12)	1.68
Length of the machine with platform extended(m)(13)	3.5
Hydraulic tank capacity L	25
Gradeability	35%
Ground clearance(m)(14)	0.15
Turn diameter(m)(inside)	0
Turn diameter(m)(outside)	2.4
Load number max	2
Raised/Lowering time(s)	32/30
Traction speed(km/h)	3.4
Safe speed(km/h)	0.7
Vertical tilt	3
Lateral tilt°	2
Power source	4*6V; 225Ah
Outrigger level ability max	Left and right 10° Front and rear 4.5°
Tire size/mm(in)	406*127*318
Weight kg	2270

XE-W/OR Working Range

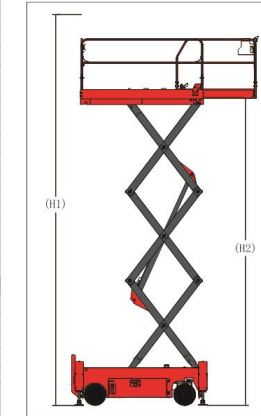

Function Description

1. This equipment is mainly used for indoor and outdoor vertical lifting.
2. The main function is to slide out the extended platform to increase the working area and the ability to rise across.
3. Strong climbing ability, could climb 35% slope.
4. The level ability of the legs is strong, about 10 degrees left and right, 4.5 degrees front and rear.
5. Multi-functional intelligent safety protection system with on-board diagnosis system and intelligent fault alarm system.

XE-W/OR Collecting Chart

