

AMP SERIES

PORTABLE TYPE AERIAL WORK PLATFORM



Standard Features

- Aluminum platform basket
- Polyurethane non-mark tires
- leverage ro-ro device
- Lifting ears
- Two controls of the platform and base
- Lower beeper warning
- Tilting device only AMP40
- Lowering switch
- Outrigger storage frame

Options Features

- Door type standard/narrow/wide platform
- Fiber glass platform
- Goods collection platform
- Narrow/Rough ground chassis
- Stairs bracket
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Maintenance-free battery
- Equipment protection cover

AMP SERIES

Model	AMP20	AMP26	AMP32	AMP40
Working height max.	8.0m	10.0m	12.0m	14.0m
Platform height max.	6.0m	8.0m	10.0m	12.0m
Lift capacity	159kg	159kg	159kg	120kg
Basket size(E*F)	0.69m*0.68m	0.69m*0.68m	0.69m*0.68m	0.69m*0.68m
Width, stowed(D)	0.74m	0.74m	0.74m	0.74m
Height, stowed(A)	1.97m	1.97m	1.97m	2.76m
Height, tilted back(B)	--	--	--	1.98m
Length, stowed(C)	1.27m	1.36m	1.42m	1.46m
Length, tilted back(J)	--	--	--	2.87m
Outrigger footprint(I*K)	1.77*1.49m	1.77*1.49m	1.99m*1.72m	2.27m*1.98m
Wall access front/side(H/G)	0.18/0.45m	0.18/0.45m	0.23/0.55m	0.42/0.65m
Power source (AC/DC)	220V/110V/12V			
Weights (AC/DC)	335kg/405kg	355kg/430kg	365kg/480kg	480kg/535kg


*The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height

**In the rising mode, the machine is designed to operate on a solid flat surface.

***Climbing ability is suitable for driving on the slope, the slope classification reference operation manual

****Weight according to the options and standards vary from country to country

AMP Collecting Chart

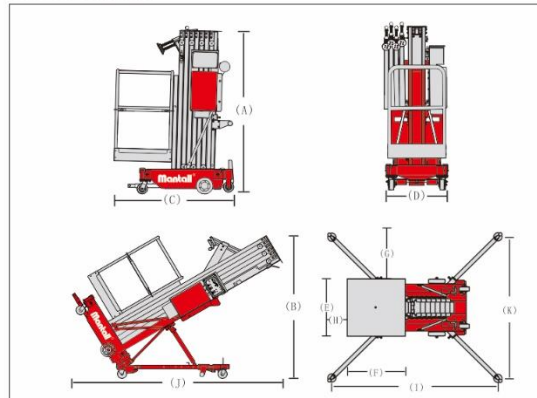

AMP Working Range

